

Canon

imageRUNNER®
2230 / 2830 / 3530



CORPORATE
SYSTEMS




ACHIEVE MORE WITHOUT EXHAUSTING YOUR BUDGET

Take command of your office productivity with the new Canon imageRUNNER® 2230/2830/3530. With the ability to deliver output at 22 and 28 pages per minute, respectively, the compact imageRUNNER 2230/2830 models are perfect for small businesses and workgroups. At 35 pages per minute, the imageRUNNER 3530 is an ideal solution for busier, medium-size offices and departments within larger corporations.

What's more, each system offers a modular, flexible design that allows you to build a system to meet your copy, printing, scanning, faxing, and document storage needs as your business dictates. All in an extremely compact, cost-effective system on which your business can depend.

imageRUNNER 2230/2830/3530 Specifications

Type:	Digital, Multifunction Imaging System	Paper Weights:	17 lb. to 20 lb. Bond (Cassette) 17 lb. to 32 lb. Bond (Stack Bypass)	Envelope Feeder Attachment-C1	
Imaging System:	Laser Electrostatic Transfer	Network Interface		Copy Speed	
Developing System:	Dry Mono Component	Connections:	10/100Base-T (RJ-45)	imageRUNNER 2230/2830:	10 cpm (All Envelopes)
Fixing System:	RAPID Fusing System™	Dimensions (H x W x D):	29-7/8" x 22-1/4" x 27-5/8" (761mm x 565mm x 700mm)	imageRUNNER 3530:	12 cpm (All Envelopes)
Image Server Memory		Installation Space: (W x D):	34" x 27-5/8"	Acceptable Envelopes:	COM10, DL, Monarch, ISO-B5, ISO-C5, Yougata-4
Standard:	128MB RAM	Weight:	Approx. 152 lb. (69kg)	Feeder Capacity:	Approx. 50 Envelopes or 1-1/4" (31.75mm)
Optional:	256MB RAM/20GB HDD	Power Requirements:	120V AC, 60Hz, 8A (2230/2830) 120V AC, 60Hz, 10A (3530)	Dimensions (H x W x D):	3-1/4" x 12-1/8" x 11-5/8" (82mm x 306mm x 295mm)
First-copy Time		Power Consumption:	1.35kW (Max.)	Weight:	Approx. 2.4 lb (1.1kg)
imageRUNNER 2230/2830:	4.9 Seconds from Platen Glass 6.9 Seconds from Feeder	Drum:	Organic Photo Conductor (OPC)	Inner 2-Way Tray-D1*	
imageRUNNER 3530:	3.9 Seconds from Platen Glass 5.9 Seconds from Feeder	Estimated Yield:	75,000 Impressions (2230/2830) 85,000 Impressions (3530)	Number of Trays:	2 Trays
Warm-up Time:	10 Seconds or Less from Sleep Mode 15 Seconds or Less from Main Power Off 30 Seconds from Main Power Off (With UFR II Printer Kit-E3 or UFR II/PCL Printer Kit-E2)	Maximum Duty Cycle:	80,000/105,000/ 130,000 Impressions/Month	Tray Capacity	
Copy/Print Speed:	22/28/35 ppm (Letter)	Toner Yield		Lower Output Tray:	250 Sheets (Letter) 100 Sheets (Other Sizes)
Max. Mail Boxes Supported:	100 (with UFR II Printer Kit-E3 or UFR II/PCL Printer Kit-E2)	imageRUNNER 2230/2830:	21,000 @ 6% Coverage	Upper Output Tray:	100 Sheets (Letter) 50 Sheets (Other Sizes)
Max. Copy Reservation:	5 Jobs	imageRUNNER 3530:	24,000 @ 6% Coverage	Acceptable Paper Sizes:	Statement to 11" x 17" 6" x 7" x 21-1/2" (151mm x 176mm x 546mm)
Actual Resolution:	600 dpi x 600 dpi	Optional Accessories		Dimensions (H x W x D):	
Interpolated Resolution:	1200 dpi x 600 dpi (Copy) 2400 dpi x 600 dpi (Print)	Duplexing Automatic Document Feeder-N1		Weight:	Approx. 8.6 lb (3.9kg)
Half-tone:	256 Gradations of Gray	Acceptable Originals:	Statement to 11" x 17"	Attachable Accessories:	Copy Tray-J1
Duplexing:	Standard Automatic Trayless Duplexing	Capacity:	50 Sheets (20 lb. Bond/Letter)	Finisher-S1*	
Magnification Reduction/ Enlargement:	25% to 400% — Platen 25% to 200% — Feeder (in 1% increments)	Max. Paper Weight:	13 lb. to 32 lb. Bond	Number of Trays:	1 Tray (Second Tray Optional)
Exposure Control:	Automatic or Manual (9 levels)	Scanning Speed:	Up to 45 Images per Minute (ipm)	Tray Capacity	
Paper Sources		Power Source:	From Main Unit	Non-collate, Collate,	
Standard:	Dual 550-sheet Paper Cassettes (1,100 Sheets) Stack Bypass (50 Sheets)	Dimensions (H x W x D):	8-7/8" x 22-1/4" x 21-1/4" (122mm x 565mm x 538mm)	Group Mode:	1,000 Sheets (Letter, Statement) 500 Sheets (11" x 17", Legal, Letter-R)
Optional:	Dual 550-sheet Cassette Feeding Unit (2,250 Sheets Max.)	Weight:	Approx. 18.7 lb. (8.5kg)	Staple Mode:	1,000 Sheets/30 Sets (Letter) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Multiple Copies:	1 to 999	Cassette Feeding Unit-Y2		Tray Capacity	
		Paper Capacity:	Dual 550-sheet Paper Cassettes (1,100 Sheets/20 lb. Bond)	(with Additional Finisher Tray-B1)	
		Acceptable Paper Sizes:	Statement-R to 11" x 17"	Non-collate, Collate,	
		Acceptable Paper Weights:	17 lb. to 20 lb. Bond	Group Mode:	300 Sheets per Tray (Letter, Statement) 150 Sheets/per Tray (11" x 17", Legal, Letter)
		Power Source:	From Main Unit		
		Dimensions (H x W x D):	9-7/8" x 22-1/4" x 27-5/8" (251mm x 565mm x 700mm)		
		Weight:	Approx. 50.7 lb. (23kg)		

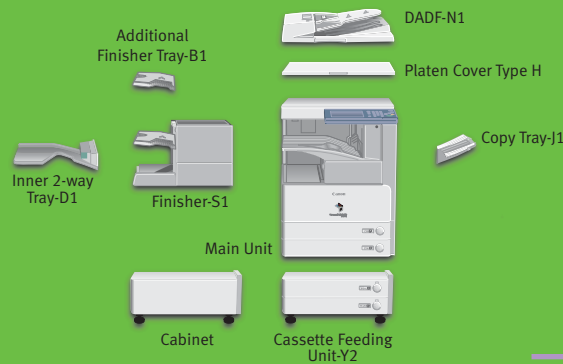

imageRUNNER®
2230 / 2830 / 3530

imageRUNNER 2230/2830/3530 Specifications (continued)

Staple Mode:	300 Sheets/30 Sets per Tray (Letter) 150 Sheets/per Tray (11" x 17", Legal, Letter)
Staple Position/Size:	150 Sheets/30 Sets (11" x 17", Legal) Corner Stapling (11" x 17", Legal, Letter, Letter-R)
Max. Stapling Capacity:	50 Sheets (Letter-17 lb.–20 lb. Bond)
Power Source:	From Main Unit
Dimensions (H x W x D):	11-7/8" x 18-7/8" x 20-1/2" (300mm x 480mm x 520mm)
Weight:	Approx. 26.5 lb. (12kg)
Attachable Accessories:	Additional Finisher Tray-B1 Puncher Unit-R1 Copy Tray-J1

Additional Finisher Tray-B1 (Option for Finisher-S1)

Dimensions (H x W x D):	3-1/8" x 7-7/8" x 15-5/8" (80mm x 200mm x 395mm)
Weight:	Approx. 3.7 lb. (1.7kg)

Puncher Unit-R1 (Option for Finisher-S1)

Max. Paper Weight:	17 lb.–32 lb. Bond
Paper Sizes	
2-hole:	Legal, Letter-R
3-hole:	11" x 17", Letter
Punch Method:	Sequential Processing System
Punch Waste Capacity	
2-hole:	2,500 Sheets
3-hole:	1,500 Sheets
Power Source:	From Main Unit
Dimensions (H x W x D):	6-7/8" x 19-7/8" x 5-1/8" (175mm x 505mm x 130mm)
Weight:	Approx. 8.6 lb. (3.9kg)

Copy Tray-J1 (Option for Inner 2-Way Tray and Finisher-S1)

Tray Capacity:	150 Sheets (Letter) 75 Sheets (Other Sizes)
Dimensions (H x W x D):	4-3/4" x 13-5/8" x 13-7/8" (120mm x 347mm x 351mm)
Weight:	Approx. 1 lb. (471g)

Super G3 Fax Board-Q1

Applicable Line:	Public Switched Telephone Network (PSTN)
Connection Lines:	One
Sending/Original Sizes:	Statement to 11" x 17" (from Document Feeder) Statement to 11" x 17"
Recording/Printing Sizes:	Statement to 11" x 17"
Transmission Times**	
ECM-MMR:	Approx. 3.2 Seconds
G3MR:	Approx. 13 Seconds
G3MH:	Approx. 13 Seconds
JBIG:	Approx. 2.6 Seconds
Scan Line Density	
Standard:	8 pels/mm x 3.85 lines/mm
Fine:	8 pels/mm x 7.7 lines/mm
Super-fine:	8 pels/mm x 15.4 lines/mm
Ultra-fine:	16 pels/mm x 15.4 lines/mm
Auto Dial Function:	Address Book: 200 Destinations
Image Memory:	Approx. 8,000 Pages

UFR II Printer Kit-E3, UFR II/PCL Printer Kit-E2***

Processor:	Canon Custom Processor—Shared
RAM:	256MB—Shared
Hard Disk:	20GB—Shared
PDL Support	
UFR II Printer Kit-E3:	UFR II
UFR II/PCL Printer Kit-E2:	PCL 5e, PCL 6, UFR II
Interface Connections	
Standard:	RJ-45 (10/100Base-T), USB 2.0 High-speed Wireless LAN***
Optional:	Wireless LAN***
Network OS:	Windows® 98/Me**** Windows 2000/XP Windows NT® 4.0****/Server 2003 Macintosh® OS 10.1.5 or Later Solaris™ 1.1x, 2.5x, or Later Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (IPX/SPX™)
Print Drivers	
UFR II:	Windows 2000/XP; Windows Server 2003, Citrix MetaFrame, Macintosh OS X (OS 10.1.5 or Later)

PCL 5e/6:

Utility Software:	Windows 98/Me/2000/XP Windows NT 4.0/Server 2003 Citrix MetaFrame Network ScanGear Remote UI Netspot® Console Netspot Job Monitor Netspot Resource Downloader Netspot Device Installer USB Class Driver Fax Driver JBIG ImageViewer Canon LPR 2 Canon NDP5 Gateway Canon Font Manager DSE (Device Status Extension) Address Book Conversion Utility
-------------------	---

Other Optional Accessories and Utilities

Platen Cover Type H
Cabinet-P1
Accessibility Handle-A1
Braille Label Kit-A1
Document Tray-J1
Card Reader-C1
Card Sets
imageRUNNER Security Kit-A2
eCopy Suite
Wireless LAN Kit***
Removable HDD Kit***

* Requires 3-way unit.

** Approximate 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (MMR, Standard Mode) at 33.6 Kbps modem speed when transmitting to another V.34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.

*** Not available at the time of launch. Check with your local Authorized Canon Dealer for availability.

**** UFR II not Supported.

Canon KNOW HOW®

© 2005 Canon U.S.A., Inc. All rights reserved.

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR certification mark are registered U.S. marks. Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh is a registered trademark of Apple Computer, Inc. Solaris is a trademark of Sun Microsystems, Inc. in the United States and other countries. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and/or other countries. IPX/SPX is a trademark of Novell, Inc. Canon, IMAGERUNNER, NetSpot, and Canon Know How are registered trademarks, and RAPID Fusing System and the GENUINE logo are trademarks, of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Remote UI is a trademark of Canon U.S.A., Inc. IMAGEANYWARE is a service mark of Canon U.S.A., Inc. in the United States. All other terms and product names may be trademarks or registered trademarks of their respective owners and are hereby acknowledged.

All specifications are subject to change without notice.

Machines shown with optional accessories/equipment.

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

